

# 3M Data Sheet


## Fasara™ Glass Shade

Product

### SH2MAOW

Fasara Glass Shade are designed and developed especially for the interior glazing.  
Fasara satisfies Shatter Resistant performance defined by JIS A 5759 (almost the same as ANSI Z97.1 Shot Bag Impact Test 100feet-lb).

Structure

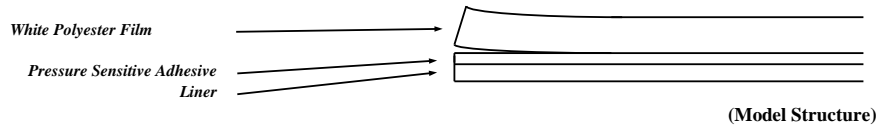

Feature

- 1.Fasara shows the same performance as Scotchshield SH2CL shatter resistant film in the test of Interlayer Displacement defined in JIS A 5759.
- 2.Fasara cuts UV ray to retard sun burn of color or furniture.

Physical Property

Product	Color	Thickness (without Liner) (micro m)	Adhesion		Break Strength		Elongation (%)
			(N/25mmW)	(kgf/10mmW)	(N/25mmW)	(kgf/10mmW)	
SH2MAOW	Opaque White	140	7.0	(App0.29)	200	(App8.2)	100

Measured by the method defined in JIS A 5759

Optical Property

Product	Shading Coefficient	Solar Heat			Visible Light		UV	U value	
		Reflectance (%)	Transmittance (%)	Absorbance (%)	Reflectance (%)	Transmittance (%)	Transmittance (%)	(W/m <sup>2</sup> K)	(kcal/m <sup>2</sup> h°C)
		SH2MAOW	0.29	41	8	51	52	6	<1

Measured by the method defined in JIS A 5759

Specimen: Film laminated 6mm thick float glass (Face of incidence: glass surface)

Shatter Resistance

Fasara applied glass satisfies the performance of shatter resistant test, Type A and Type B, defined in JIS A5759.

\*The above numbers are not guaranteed, and those would be changed without announcement.